

DETAIL FOR 3/4"Ø THRU 2 1/2"Ø ANCHOR BOLTS



OPTIONAL DETAIL FOR 1 3/8"Ø THRU 2 1/2"Ø ANCHOR BOLTS

SWEDGE ANCHOR BOLT DETAILS

(1) $\frac{1}{8}$" for $\frac{3}{4}$"Ø thru $1\frac{1}{4}$"Ø anchor bolts

$\frac{1}{8}$" to $\frac{1}{4}$" for $1\frac{3}{8}$"Ø thru $2\frac{1}{2}$"Ø anchor bolts

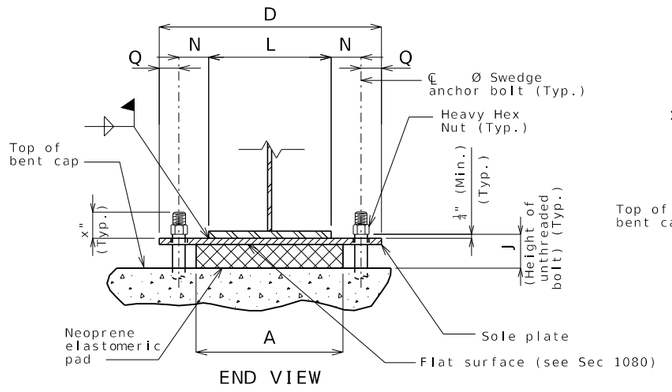

END VIEW

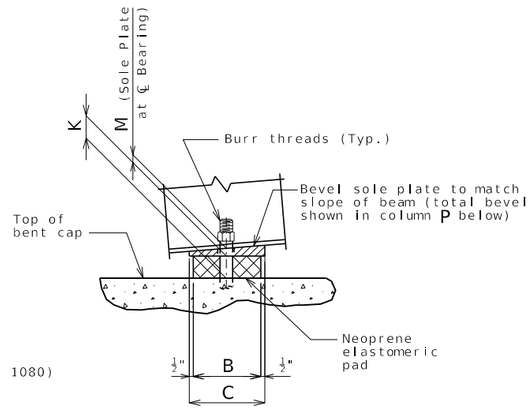

SIDE VIEW

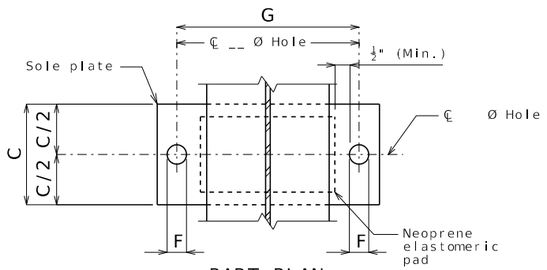

PART PLAN

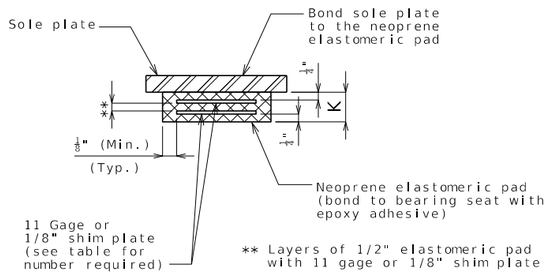

NEOPRENE ELASTOMERIC PAD

Standard Drawing Guidance:
(do not show on plans.)

1. Use note H3.49.1 with Grade 50W steel.
   Use note H3.49.2 when steel superstructure is galvanized.
   (H3.49 shown)
2. Remove underlined portion when steel superstructure is galvanized.

GENERAL NOTES:

Anchor bolts shall be Ø ASTM F1554 Grade 55 105 swedged bolts and shall extend into the concrete with ASTM A563 Grade A DH Heavy Hex nuts. Actual manufacturer's certified mill test reports (chemical and mechanical) shall be provided. Swedging shall be 1" less than extension into the concrete.

(2) Anchor bolts and heavy hex nuts shall be coated with a minimum of two coats of inorganic zinc primer to provide a total dry film thickness of 4 mils minimum, 6 mils maximum, or galvanized in accordance with with ASTM F2329.

Neoprene Elastomeric Pads shall be Durometer.

(1) Structural steel for sole plate shall be ASTM A709 Grade and shall be coated with a minimum of two coats of inorganic zinc primer to provide a total dry film thickness of 4 mils minimum, 6 mils maximum.

Laminated Neoprene Bearing Pad Assembly shall be in accordance with Sec 716.

FIXED BEARINGS															
BENT NO.	A	B	C	D	F	G	J	K	L	M	N	P	Q	NUMBER OF SHIM PLATES *	NUMBER REQUIRED
														TOTAL BEARINGS	

* The required shim plate shall be placed between layers of elastomer and molded together to form an integral unit.

LAMINATED NEOPRENE BEARING PAD ASSEMBLY

Detailed
Checked

Note: This drawing is not to scale. Follow dimensions. Sheet No. of

DATE PREPARED 5/12/2026
ROUTE STATE MO
DISTRICT SHEET NO. 6
COUNTY
JOB NO.
CONTRACT ID.
PROJECT NO.
BRIDGE NO.

DESCRIPTION | DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)