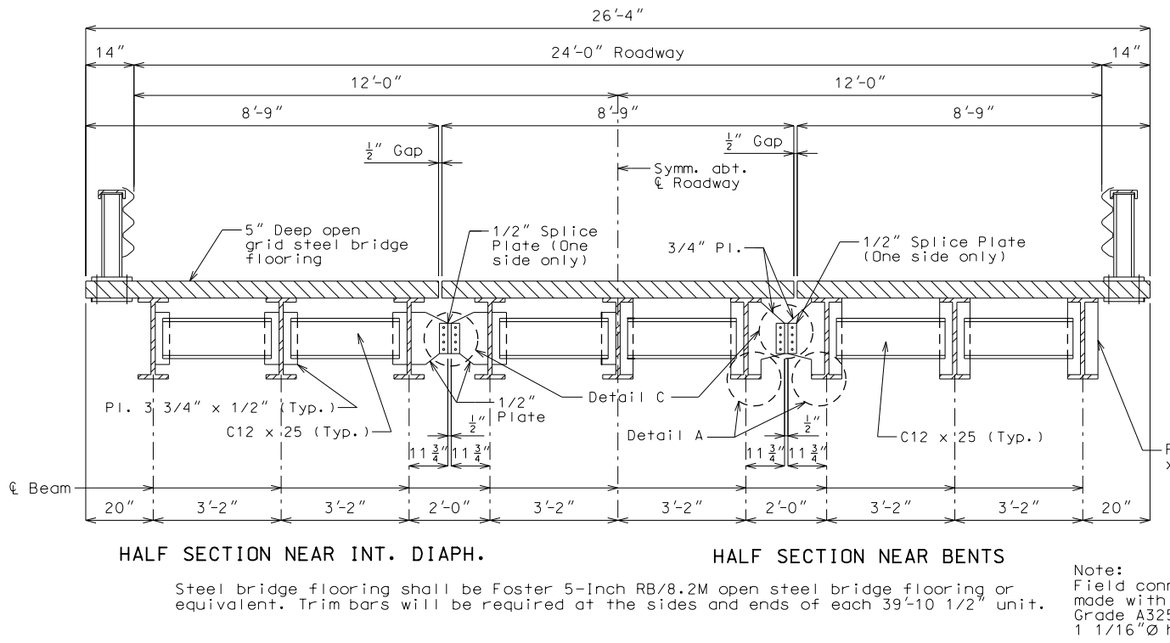

HALF SECTION NEAR INT. DIAPH. HALF SECTION NEAR BENTS

Steel bridge flooring shall be Foster 5-Inch RB/8.2M open steel bridge flooring or equivalent. Trim bars will be required at the sides and ends of each 39'-10 1/2" unit.

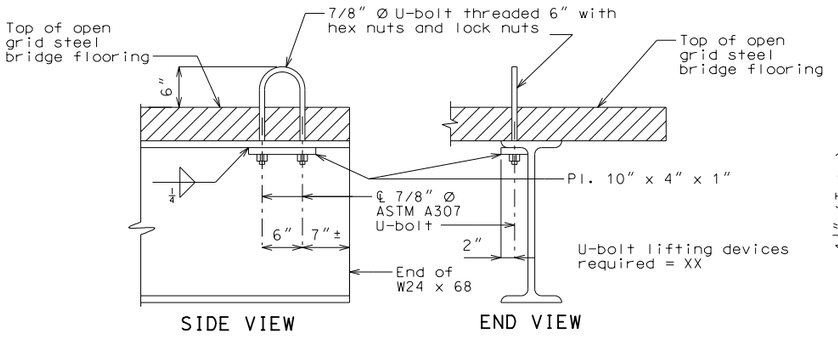

DETAILS OF U-BOLTS LIFTING DEVICE

U-bolts lifting device shall be on the inside top flange at both ends of each exterior beam of each unit. U-bolts shall be removed during the time the bridge is open to traffic. Position of the U-bolts may be shifted slightly to miss the bars in the flooring.



DETAIL A

Note:
Field connections shall be made with 7/8"Ø ASTM F3125 Grade A325 Type 3 bolts and 1 1/16"Ø holes except as noted.

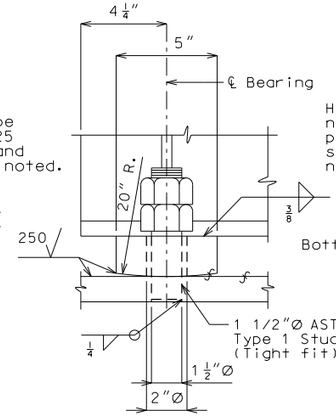

SIDE VIEW

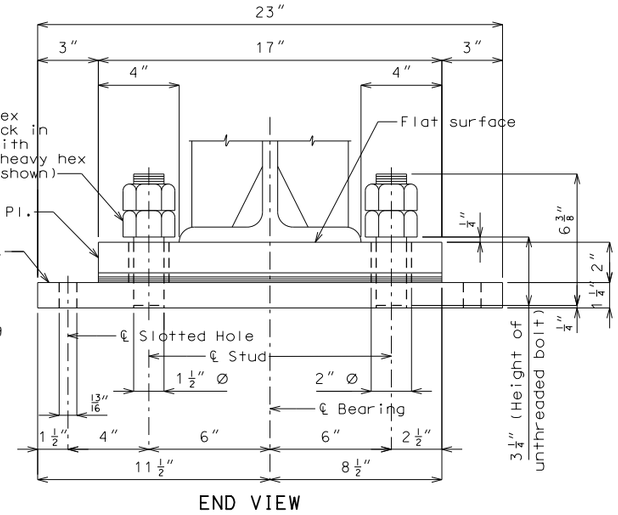

END VIEW

DETAILS OF BEARINGS

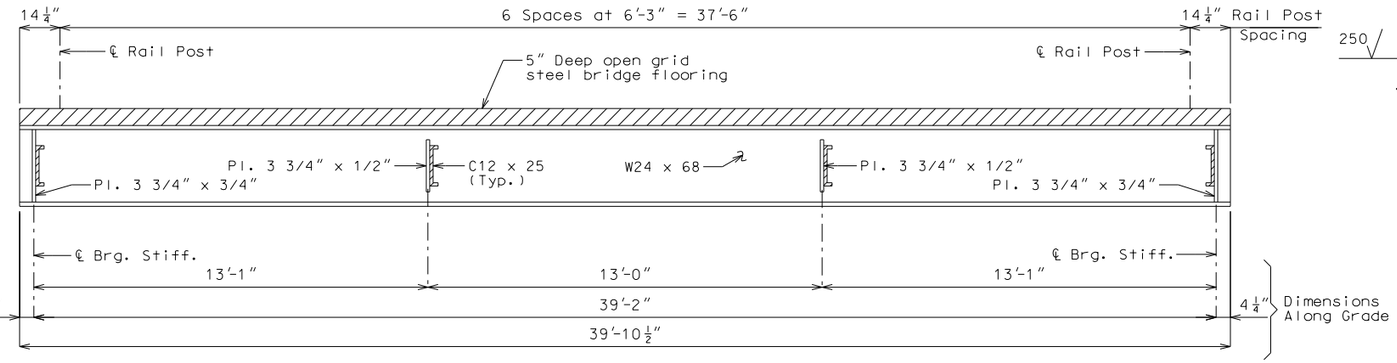

LONGITUDINAL SECTION – ALL SPANS

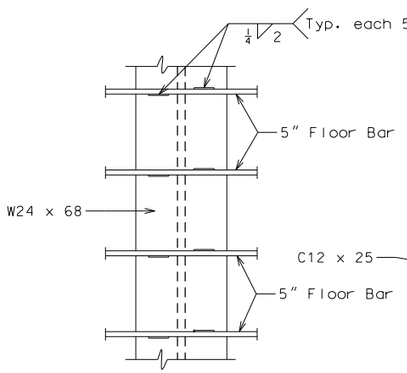

FLOORING TO BEAM CONNECTION

(Typical Connection of Each Beam)

Cross bars of steel grid floor are not shown for clarity.

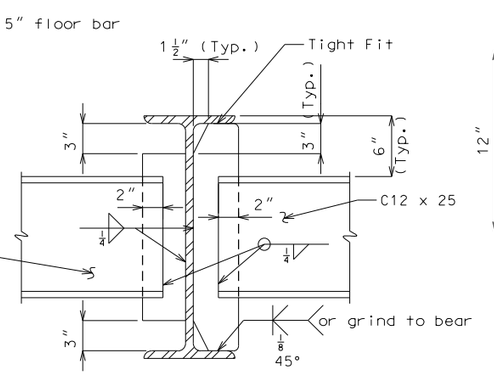

INT. DIAPH. BEARING STIFF.



DETAIL C

Note:
Use 1 1/16" Ø holes thru 10" x 4" x 1" plate and flange of W24 x 68.

NO. REQUIRED

XX Top plates
XX Bott. plates (Int. Bents)
XX Bott. plates (End Bents)

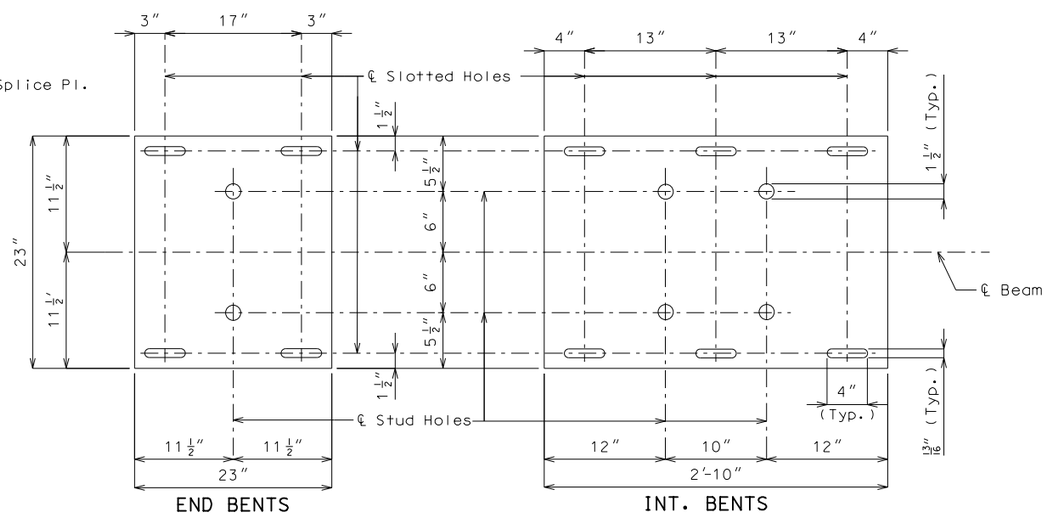

END BENTS INT. BENTS

PLAN OF BOTTOM PLATES

"THIS MEDIA SHOULD NOT BE CONSIDERED A CERTIFIED DOCUMENT."

DATE PREPARED 7/23/2020

ROUTE * STATE MO

DISTRICT BR SHEET NO. *

COUNTY *

JOB NO. *

CONTRACT ID.

PROJECT NO.

BRIDGE NO. TEMP 3

DESCRIPTION | DATE

IF A SEAL IS PRESENT ON THIS SHEET IT HAS BEEN ELECTRONICALLY SEALED AND DATED.

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

Detailed
Checked

Note: This drawing is not to scale. Follow dimensions.

Sheet No. of