


Guidance & Alternate Details BAR03_D_end_si **└**► C X ' - XX " X ' - XX " - € 1/4" Joint — X ' - XX " X ' - XX " Spaced with K1, K2 & K3 Spaced with K1, K2 & K3 9-#5-K8 & K9 X-#5-K10 & K11 X-#5-K10 & K11 9-#5-K8 & K9 6-#5-K12 (7) $(1) | 2\frac{5}{8}$ 2½" 9 Spa. @ 6" (1) 9 Spa. @ 6" X Spa. @ X Spa. @ abt. 12" abt. 12" X-#5-K2 (Spa. as shown) X-#5-K2 (Spa. as shown)

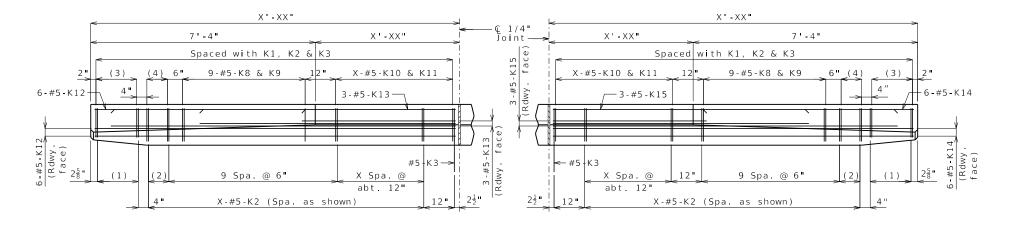

PART PLAN

PART ELEVATION

/--- #5-K10



ALTERNATE DETAILS FOR SKEWED BRIDGES REQUIRING K3 BARS

Standard Drawing Guidance: (do not show on plans)

For skews greater than 3 degrees, use alternate details above, which substitutes a K3 bar for the end K2 bar. For skews greater than 41 degrees, two K3 bars are required.

 $\hfill \begin{tabular}{ll} \hline \hfill \hfill$